


Dimensions suivant la normes UNE-EN 545

Raccordement sur brides PN 10 ou PN 16 , PN 25

Construction : fonte GGG-40 revêtue époxy

Coude à 45°							
DN	Corps (mm)			Poids (Kg)			
	L	e	c	PN 10	PN 16	PN 25	
50	95	7	3	5.7	5.7	5.7	
60	100			6.4	6.4	6.6	
65	105			7.2	7.2	7.4	
80	113			8.2	8.2	9.2	
100	123			7.2	10.1	10.1	12.3
125	138			7.5	13.8	13.8	17
150	148			7.8	18.3	18.3	21.5
200	174	8.4	28.5	27.5	33.3		
250	204	9	40.6	41.5	48.5		
300	227	9.6	55.6	58	65.6		
350	257	10.2	75.1	79.3	91.3		
400	280	10.8	93.8	102	117.4		
450	309	11.4	114.9	127.9	141.3		
500	332	12	141.1	167.1	179.7		
600	385	13.2	201.8	256.5	258.7		
700	437	14.4	293	328.5	345.5		
800	469	15.6	400	445.5	460.5		

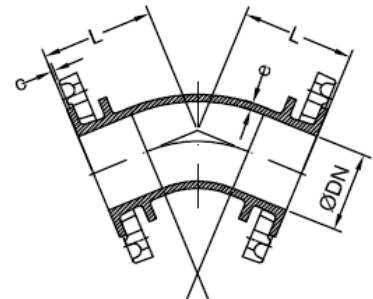

Coude à 90°						
DN	Corps (mm)			Poids (Kg)		
	L	e	c	PN 10	PN 16	PN 25
50	125	7	3	6	6	6
60	135			6.8	6.8	7
65	140			7.6	7.6	7.9
80	143			8.6	8.6	9.6
100	158	7.2	10.7	10.7	12.9	
125	178	7.5	14.7	14.7	17.9	
150	193	7.8	19.5	19.5	22.7	
200	226	8.4	30.2	29.2	35	
250	314	9	47.6	48.4	55.4	
300	357	9.6	66.2	68.6	76.3	
350	450	10.2	95.9	100	112.1	
400	500	10.8	122.5	130.7	146.1	
450	550	11.4	152	165	178.4	
500	600	12	189.5	215.5	228.1	
600	750	13.2	276.5	331.1	333.3	
700	800	14.4	293	438.2	345.5	
800	900	15.6	553.5	599.2	614	

